
COMPUTER SCIENCE

9608/13

Paper 1 Written Paper

May/June 2017

MARK SCHEME

Maximum Mark: 75

Published

This mark scheme is published as an aid to teachers and candidates, to indicate the requirements of the examination. It shows the basis on which Examiners were instructed to award marks. It does not indicate the details of the discussions that took place at an Examiners' meeting before marking began, which would have considered the acceptability of alternative answers.

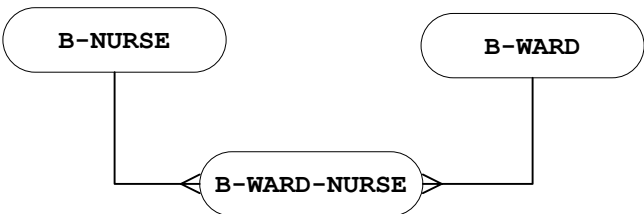
Mark schemes should be read in conjunction with the question paper and the Principal Examiner Report for Teachers.

Cambridge will not enter into discussions about these mark schemes.

Cambridge is publishing the mark schemes for the May/June 2017 series for most Cambridge IGCSE[®], Cambridge International A and AS Level and Cambridge Pre-U components, and some Cambridge O Level components.

© IGCSE is a registered trademark.

This document consists of **8** printed pages.

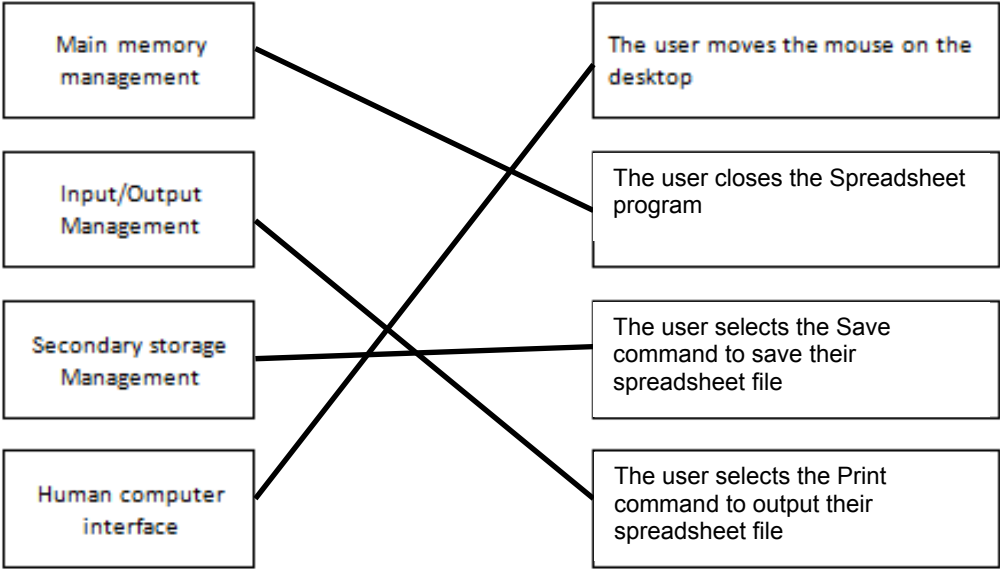
Question	Answer	Marks
1(a)	Many-to-one	1
1(b)(i)	A-NURSE (<u>NurseID</u> , FirstName, FamilyName, WardName)	1
1(b)(ii)	The primary key <u>WardName</u> in the A-WARD table links to the foreign key <u>WardName</u> in the A-NURSE table.	1 1
1(c)(i)	Many-to-many relationship	1
1(c)(ii)	B-WARD-NURSE (<u>WardName</u> , <u>NurseID</u>) Both attributes (with no additions) Joint primary key correctly underlined	1 1
1(c)(iii)	 <p>Correct relationship between B-NURSE and B-WARD-NURSE Correct relationship between B-WARD and B-WARD-NURSE</p>	1 1
1(d)(i)	SELECT NurseID, FamilyName FROM B-NURSE WHERE Specialism = 'THEATRE';	1 1 1
1(d)(ii)	UPDATE B-NURSE SET FamilyName = 'Chi' WHERE NurseID = '076';	1 1 1

Question	Answer	Marks														
2(a)(i)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%; text-align: center;">1</td> <td>A laser beam and a rotating mirror are used to draw an image of the page on the photosensitive drum.</td> </tr> <tr> <td style="text-align: center;">2</td> <td>C // The image is converted on the drum into an electrostatic charge.</td> </tr> <tr> <td style="text-align: center;">3</td> <td>Electrostatic charge attracts toner.</td> </tr> <tr> <td style="text-align: center;">4</td> <td>The charged paper is rolled against the drum.</td> </tr> <tr> <td style="text-align: center;">5</td> <td>D // The oppositely-charged paper picks up the toner particles from the drum. After picking up the toner, the paper is discharged to stop it clinging to the drum.</td> </tr> <tr> <td style="text-align: center;">6</td> <td>A // The paper passes through a fuser, which heats up the paper. The toner melts and forms a permanent image on the paper.</td> </tr> <tr> <td style="text-align: center;">7</td> <td>B // The electrical charge is removed from the drum and the excess toner is collected.</td> </tr> </table> <p style="margin-left: 20px;">C in the correct place 1 DA, 1 AB 1</p>	1	A laser beam and a rotating mirror are used to draw an image of the page on the photosensitive drum.	2	C // The image is converted on the drum into an electrostatic charge.	3	Electrostatic charge attracts toner.	4	The charged paper is rolled against the drum.	5	D // The oppositely-charged paper picks up the toner particles from the drum. After picking up the toner, the paper is discharged to stop it clinging to the drum.	6	A // The paper passes through a fuser, which heats up the paper. The toner melts and forms a permanent image on the paper.	7	B // The electrical charge is removed from the drum and the excess toner is collected.	3
1	A laser beam and a rotating mirror are used to draw an image of the page on the photosensitive drum.															
2	C // The image is converted on the drum into an electrostatic charge.															
3	Electrostatic charge attracts toner.															
4	The charged paper is rolled against the drum.															
5	D // The oppositely-charged paper picks up the toner particles from the drum. After picking up the toner, the paper is discharged to stop it clinging to the drum.															
6	A // The paper passes through a fuser, which heats up the paper. The toner melts and forms a permanent image on the paper.															
7	B // The electrical charge is removed from the drum and the excess toner is collected.															
2(a)(ii)	Inkjet printer	1														
2(b)	<p>Hard disk drive // HDD 1 Solid state drive //SSD // flash memory 1 One from: <i>Hard disk</i> Inexpensive per unit of storage 1 Larger storage capacity than flash drive 1</p> <p><i>Solid state storage</i> No moving parts / noise 1 Robust 1 Low latency // Fast read/write time 1</p>	3														

Question	Answer	Marks
3(a)	<p><i>Sampling rate</i> The <u>number of samples</u> taken <u>per unit time</u> // the number of times the amplitude is measured <u>per unit time</u></p> <p>Increasing the sampling rate will increase the accuracy / precision of the digitised sound // Increasing the sampling rate will result in smaller quantisation errors.</p>	<p>1</p> <p>1</p> <p>2</p>
3(b)(i)	<p><i>Pixel</i> Smallest picture element which can be drawn</p> <p><i>Screen resolution</i> The number of pixels which can be viewed horizontally and vertically on the screen // or by example - A typical screen resolution is 1680 pixels · 1080 pixels.</p>	<p>1</p> <p>1</p> <p>2</p>
3(b)(ii)	8	1
3(b)(iii)	<p><i>Working: Max two from:</i></p> <p>Number of pixels is $2048 \cdot 512$</p> <p>One pixel will be stored as one byte</p> <p>Number of kilobytes = $(2048 \cdot 512) / 1024$</p> <p><i>Answer: One mark:</i></p> <p>Number of kilobytes = 1024 KB</p>	<p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>3</p>
3(b)(iv)	<p>One from:</p> <p>Confirmation that the file is a BMP</p> <p>File size</p> <p>Location/offset of image data within the file</p> <p>Dimensions of the image in pixels // image resolution</p> <p>Colour depth (bits per pixel)</p> <p>Type of compression used, if any</p>	<p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>1</p>

Question	Answer	Marks																																	
4(a)(i)	500	1																																	
4(a)(ii)	496	1																																	
4(a)(iii)	502	1																																	
4(a)(iv)	86	1																																	
4(b)	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">1</td> <td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">1</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">0</td><td style="width: 50%;">1</td> </tr> <tr> <td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td> <td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td> </tr> </table> <p>Both correct op codes 1 Operand 0001 0001 1 Operand 0110 0001 1</p>	0	0	0	0	0	0	0	0	1	0	0	0	1	0	0	0	1	0	0	0	0	0	1	1	0	0	1	1	0	0	0	0	1	3
0	0	0	0	0	0	0	0	1	0	0	0	1	0	0	0	1																			
0	0	0	0	0	1	1	0	0	1	1	0	0	0	0	1																				
4(c)	256	1																																	
4(d)(i)	07 C2 07 C2	2 1 1																																	
4(d)(ii)	LDI 63 LDI 63	2 1 1																																	

Question	Answer	Marks																																																																																								
5(a)(i)	Count the number of one bits in the <u>first seven</u> bit positions Add a 0 or 1 to bit position 0, to make the count of one bits an <u>odd</u> number	1 1 2																																																																																								
5(a)(ii)	A = 1 B = 1	1																																																																																								
5(a)(iii)	Two from: A parity bit is worked out for each <u>column</u> The computer checks the parity of each bit position in parity byte // the computer generates copy of the parity byte and <u>compares</u> If incorrect parity then there is an error in the data received // No parity error means no error in the data received The position of the incorrect bit can be determined	1 1 1 1 2																																																																																								
5(b)(i)	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="8">Bit position</th> </tr> <tr> <th>7</th> <th>6</th> <th>5</th> <th>4</th> <th>3</th> <th>2</th> <th>1</th> <th>0</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>1</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>0</td> <td>0</td> <td style="border: 1px solid blue;">1</td> <td>1</td> <td style="border: 1px solid blue;">0</td> <td>1</td> <td>0</td> <td>1</td> </tr> <tr> <td>1</td> <td>1</td> <td>1</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>1</td> </tr> <tr> <td>1</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>1</td> <td>0</td> </tr> <tr> <td>0</td> <td>0</td> <td style="border: 1px solid blue;">1</td> <td>0</td> <td style="border: 1px solid blue;">0</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>1</td> </tr> <tr> <td colspan="8" style="text-align: center;"> </td> </tr> <tr> <td style="border: 1px solid black;">0</td> <td style="border: 1px solid black;">1</td> <td style="border: 1px solid black;">0</td> <td style="border: 1px solid black;">1</td> <td style="border: 1px solid black;">1</td> <td style="border: 1px solid black;">0</td> <td style="border: 1px solid black;">0</td> <td style="border: 1px solid black;">0</td> </tr> </tbody> </table>	Bit position								7	6	5	4	3	2	1	0	1	0	0	0	1	1	0	0	0	0	1	0	0	0	0	0	0	0	1	1	0	1	0	1	1	1	1	1	0	0	0	1	1	1	0	0	0	0	1	0	0	0	1	0	0	1	0	0	0	0	0	0	0	0	0	1									0	1	0	1	1	0	0	0	2
Bit position																																																																																										
7	6	5	4	3	2	1	0																																																																																			
1	0	0	0	1	1	0	0																																																																																			
0	0	1	0	0	0	0	0																																																																																			
0	0	1	1	0	1	0	1																																																																																			
1	1	1	1	0	0	0	1																																																																																			
1	1	0	0	0	0	1	0																																																																																			
0	0	1	0	0	1	0	0																																																																																			
0	0	0	0	0	0	0	1																																																																																			
0	1	0	1	1	0	0	0																																																																																			
5(b)(ii)	Three from: Consider each row in sequence Identify any row with incorrect parity Repeat the process for each column in sequence Identify where a row and column with incorrect parity intersect	1 1 1 1 3																																																																																								

Question	Answer	Marks
6(a)	 <p>One mark for each correct line from each left hand box to max <u>three</u> marks.</p>	3
6(b)(i)	File compression software	1
6(b)(ii)	Backup software	1
6(b)(iii)	Disk repair software	1
6(b)(iv)	Anti-virus software	1

Question	Answer	Marks
7(a)	Two from: The user's web browser is the client software The requested web page has program code / script embedded <u>within it</u> This code is interpreted by the web browser	2 1 1 1
7(b)	Four from: The browser parses the URL to obtain the Domain Name The browser software passes the Domain Name to the nearest Domain Name Server (DNS) The DNS stores a list of Domain Names and matching IP addresses The DNS Name Resolver looks for the Domain Name in its database If found the corresponding IP address is returned to the originator If not found the request is forwarded to another higher level DNS The original DNS adds the returned IP address to its cache The original DNS returns the IP address to the originator The browser uses the IP address to request the required web page from the <u>web server</u> The web server retrieves the page and delivers it to the originator The browser software interprets <u>the script</u> and displays the web page	Max 4 1 1 1 1 1 1 1 1 1 1 1 1
7(c)(i)	Message1, Message2 x	1 1 2
7(c)(ii)	6 – 19	1
7(c)(iii)	11	1
7(c)(iv)	Checks that the product code has not be left blank // presence check on product code	1
7(c)(v)	Two checks from: One mark for check and one mark for description Range check Check the number entered is (say) between 1 and 100 Format check Checks the product code is a particular format // Checks the number has digit characters only // by example Length check The number of items has exactly five characters Existence check To ensure the product code has been assigned	Max 4 1 1 1 1 1 1 1 1